

Flood & Work Light

LED Flood Light (General Lighting ERP Class C)




01



60W




85W

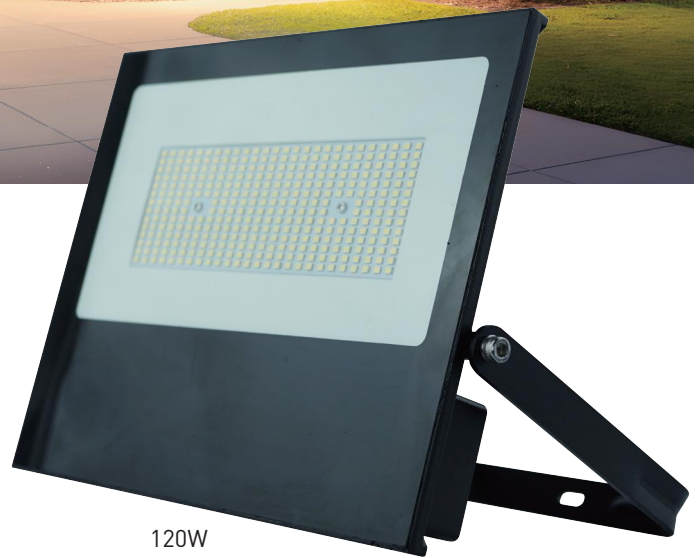

120W



160W



CB CE ErP 



No Flicker



Ra80



50000h



165-265V



For Outdoor



110°




0.95

Model No. 产品规格	Dimension LxHxW(mm)	Rated Power 额定功率	Cable 电源线	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFL-XRGL-E10	230*162*35	60W	0.95m H05RN-F3G 1.00mm ² rubber cable	175-170 lm/W	4000K-6500K	10	48.5*25*20
XGYFL-XRGL-E20	276*206*36	85W	0.95m H05RN-F3G 1.00mm ² rubber cable	175-170 lm/W	4000K-6500K	10	29.5*48*22.5
XGYFL-XRGL-E30	306*235*36	120W	0.95m H05RN-F3G 1.00mm ² rubber cable	175-170 lm/W	4000K-6500K	10	63.5*25*26.8
XGYFL-XRGL-E50	360*290*36	160W	0.95m H05RN-F3G 1.00mm ² rubber cable	180-175 lm/W	4000K-6500K	5	37.5*25*30.5

Flood & Work Light

LED Flood Light (General Lighting)

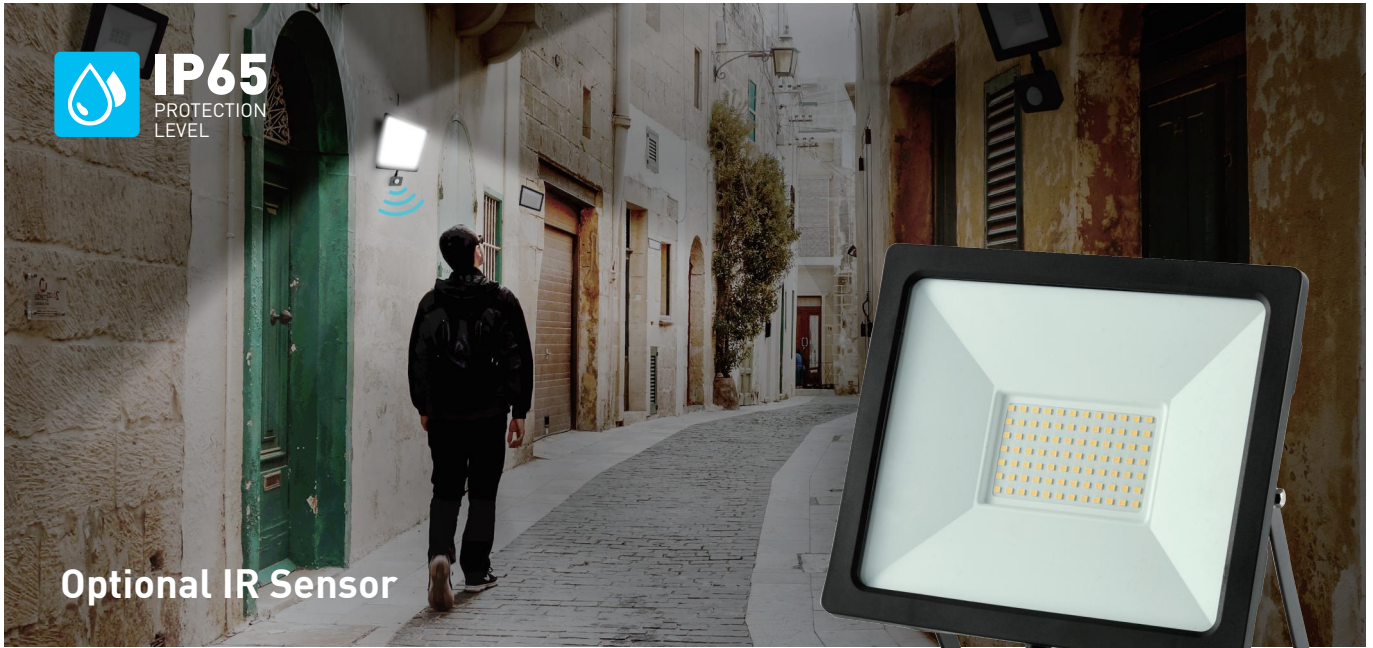

IP65
PROTECTION
LEVEL

Optional IR Sensor



10W



20W



30W



50W



70W



100W



When the people moves in the detection area, the lamp is 100% light.

02

CB CE ErP 



No Flicker



Ra80



25000h



S: AC 220-240V
U: 110-240V



For Outdoor



110°



0.9

Model No. 产品规格	Dimension WxHxT(mm)	Rated Power 额定功率	Cable 电源线	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFL-XRGL-E10	90*70*28	10W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	60	38.0*32.0*21.0
XGYFL-XRGL-E20	118*90*28	20W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	40	38.0*26.0*24.5
XGYFL-XRGL-E30	148*120*28	30W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	40	38.0*32.0*29.5
XGYFL-XRGL-E50	178*150*28	50W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	20	38.0*19.0*36.0
XGYFL-XRGL-E70	218*35*180	70W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	20	45.0*37.0*21.0
XGYFL-XRGL-E100	250*215*30	100W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	10	38.0*26.3*25.5

Flood & Work Light



LED Flood Light (High Output)




IP65
PROTECTION LEVEL

03

Features :

- ☒ Durable & Rubber H05RN-F3G Cable, Optional Plugs for Different Countries
- ☒ High Transmission Tempered Glass, in Aerospace
- ☒ Aluminum Body of Good Heat Dissipation
- ☒ IP65 Protection Level

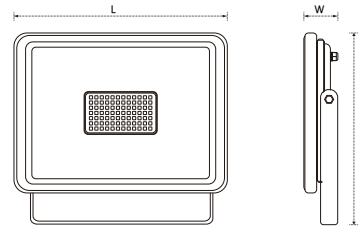

Model No. 产品规格	Dimension LxHxW(mm)	Rated Power 额定功率	Cable 电源线	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFL-XRHO-E150	320*230*30	150W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	5	35.0*22.0*25.5
XGYFL-XRHO-E200	380*365*30	200W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	5	40.5*22.0*29.0
XGYFL-XRHO-E250	380*340*45	250W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	5	41.0*31.5*36.5
XGYFL-XRHO-E300	480*310*60	300W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	2	50.5*41.5*22.5
XGYFL-XRHO-E400	500*375*60	400W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	2	56.5*44.5*22.5
XGYFL-XRHO-E500	605*480*77	500W	0.15m H05RN-F3G 1.50mm ² rubber cable	90-120 lm/W	3000K-6500K	1	61.0*8.7*50.0

Flood & Work Light

LED Flood Light (Portable)



IP65
PROTECTION
LEVEL

Features



Rotate 360°



Base rotation 180°



CB CE ErP 



No Flicker



Dimmable
Option



Ra80



25000h



S: AC 220-240V
U: 110-260V



For Outdoor



110°



0.9

Model No. 产品规格	Dimension WxHxT(mm)	Rated Power 额定功率	Cable 电源线	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFL-PORT-E10	162*185*52	10W	1.5m H05RN-F3G1.0mm ² + VDE plug	90-120 lm/W	3000K-6500K	20	500*300*355
XGYFL-PORT-E20	190*220*52	20W	1.5m H05RN-F3G1.0mm ² + VDE plug	90-120 lm/W	3000K-6500K	20	530*300*410
XGYFL-PORT-E30	220*223*55	30W	1.5m H05RN-F3G1.0mm ² + VDE plug	90-120 lm/W	3000K-6500K	10	620*250*245
XGYFL-PORT-E50	240*245*56	50W	1.5m H05RN-F3G1.0mm ² + VDE plug	90-120 lm/W	3000K-6500K	10	630*270*265
XGYFL-PORT-E70	285*310*56	70W	1.5m H05RN-F3G1.0mm ² + VDE plug	90-120 lm/W	3000K-6500K	10	630*320*340
XGYFL-PORT-E100	327*340*58	100W	1.5m H05RN-F3G1.0mm ² + VDE plug	90-120 lm/W	3000K-6500K	5	340*340*370

Flood & Work Light



LED Flood Light (Tripod)



IP65
PROTECTION LEVEL

05

Replaceable head

Adjustable Tilt-Up to 90° down and 90° up

Telescopic design adjustable 2 feet - 5 feet

Triangle support more stable

CB CE ErP



No Flicker



Ra80



25000h



S: AC 220-240V
U: 110-260V



For Outdoor



110°



0.5/0.9

Model No. 产品规格	Dimension WxHxT (mm)	Rated Power 额定功率	Cable 电源线	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸 (cm)
XGYFL-TRIPOD-E30	162*185*52	30W	1.5m H05RN-F3G1.0mm ² + VDE plug	90-120 lm/W	3000K-6500K	4	770*330*330
XGYFL-TRIPOD-E50	240*245*56	50W	1.5m H05RN-F3G1.0mm ² + VDE plug	90-120 lm/W	3000K-6500K	4	700*330*380
XGYFL-TRIPOD-E60	220*223*55	60W	1.5m H05RN-F3G1.0mm ² + VDE plug	90-120 lm/W	3000K-6500K	4	700*330*400
XGYFL-TRIPOD-E100	240*245*56	100W	1.5m H05RN-F3G1.0mm ² + VDE plug	90-120 lm/W	3000K-6500K	4	700*330*400

Flood & Work Light



LED 360° Cylindrical Working Light (Portable Version)



IP65
PROTECTION LEVEL

Hangable Handle

Inter-connections (Up to 5 Lamps)

Portable Model




Power Input



Interconnection Base



Collapse Mode

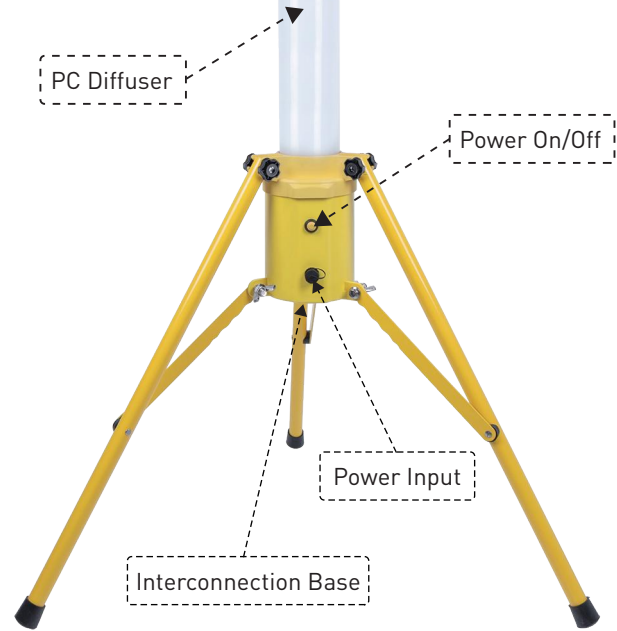

PC Diffuser

Power On/Off

Power Input

Interconnection Base

06

CB CE ErP



No Flicker



Ra70/80



25000h



U:85-265V
S:185-265V



For Outdoor



360°



0.9

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Cable Length 插头线长度	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCWL-P-E65	Φ165*900 Φ800*1260	65W	3m/5m/10m	85 lm/W	3000K-6500K	1	20*20*91
XGYCWL-PR-E40 (Rechargeable)	Φ165*900 Φ800*1260	40W	3m/5m/10m	85 lm/W	3000K-6500K	1	20*20*91

Flood & Work Light



LED 360° Cylindrical Working Light (Telescopic Version)




Telescopic Model

07




Collapse Mode Control



Power Input



Collapse Mode

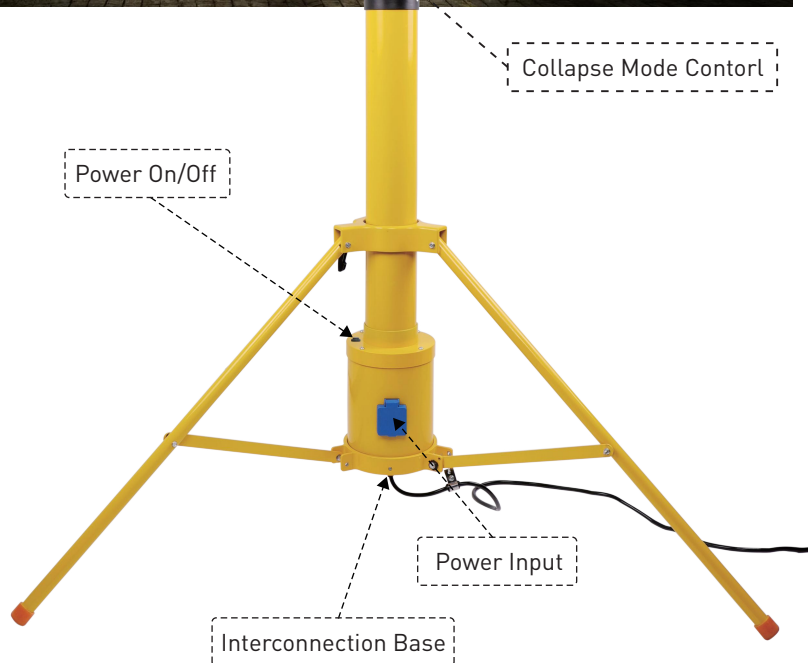

CB CE ErP



No Flicker



Ra70/80



25000h



U:85-265V
S:185-265V



For Outdoor



360°



0.9

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Cable Length 插头线长度	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCWL-T-E65	Φ217*395 Φ600*1610	65W	3m/5m/10m	85 lm/W	3000K-6500K	1	25*25*100
XGYCWL-TR-E40 (Rechargeable)	Φ217*395 Φ600*1610	40W	3m/5m/10m	85 lm/W	3000K-6500K	1	25*25*100

Flood & Work Light

LED Balloon Light



Telescopic Model



Carry Bag (Tripod)



Flank Plate



Balloon (Reflector)



Carry Bag (Light Source)



Balloon (Diffuser)



LED Light Source



Ground Nail



Tripod



08

CB CE ErP 



No Flicker



Ra80



25000h



U:85-265V



For Outdoor



360°



0.9

Model No.
产品规格

Dimension
DxH(mm)

Rated Power
额定功率

Cable Length
插头线长度

Lumen Efficacy
光效

Color Temp.
色温

PCS/CTN
装箱数量

CTN MEAS.
装箱尺寸(cm)

XGYBL-240W
Ballon: $\Phi 600 \times 400$
Tripod Height: 1,100-1,950
Diameter: 880

240W

3m/5m/10m

110 lm/W

5000K/6500K

1

95*20*33

Flood & Work Light



LED Work Light



Stand-alone stent



COB sidelight



IPX4



No Flicker



Ra80



25000h



For Outdoor



0.9

XGYWL-WS-W51

Dimension LxWxH(mm)	LED Type LED光源	Total Lumen 光通量	Body Material 材质	Battery Capacity 电池容量	Using / Charing Time 使用/充电时间	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
50*50*147	COB	500lm +1000lm	ABS+PC	1*2200mAh	Use 10-18hrs Charge 3hrs	3000K	100	56.5*28.0*33.5



XGYWL-WS-X203

Total Lumen 光通量	Battery Capacity 电池容量	Using / Charging Time 使用/充电时间
300+500lm +500lm	1*2200mAh	Use 4-8hrs Charge 4hrs
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
35*42*154	100	42.0*27.0*34.0
LED Type LED光源	Color Temp. 色温	Body Material 材质
XPE+SMD	3000/6500K	ABS+PC



XGYWL-WS-Y59

Total Lumen 光通量	Battery Capacity 电池容量	Using / Charging Time 使用/充电时间
1200lm	2*2200mAh	Use 5-10hrs Charge 7hrs
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
145*103*40	50	56.5*32*25.5
LED Type LED光源	Color Temp. 色温	Body Material 材质
4AA/30*LED+ 8*LED	3000/6500K Purple	ABS+TPR



XGYWL-WS-Y36

Total Lumen 光通量	Battery Capacity 电池容量	Using / Charging Time 使用/充电时间
1200lm	2*2200mAh	Use 5-10hrs Charge 7hrs
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
34*66*111	60	30*32*46
LED Type LED光源	Color Temp. 色温	Body Material 材质
SMD	3000K	ABS+TPR+PC



XGYWL-WS-Y37

Total Lumen 光通量	Battery Capacity 电池容量	Using / Charging Time 使用/充电时间
1200lm +300lm	2*2200mAh	Use 5-10hrs Charge 7hrs
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
22*58*116	60	30*32*46cm
LED Type LED光源	Color Temp. 色温	Body Material 材质
SMD	3000/6500K Red	ABS+TPR+PC



XGYWL-WS-Y40

Total Lumen 光通量	Battery Capacity 电池容量	Using / Charging Time 使用/充电时间
500lm +1000lm	4000mAh	Use 5-10hrs Charge 5hrs
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
20*74*142	50	50*33*20
LED Type LED光源	Color Temp. 色温	Body Material 材质
SMD	3000K	ABS+TPR+PC



XGYWL-WS-X303

Total Lumen 光通量	Battery Capacity 电池容量	Using / Charging Time 使用/充电时间
300lm+1000lm +500lm	1*2200mAh	Use 4-8hrs Charge 4hrs
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
30*42*163	100	42*32*36
LED Type LED光源	Color Temp. 色温	Body Material 材质
XPG+SMD	3000K	ABS+PC



XGYWL-WS-X678

Total Lumen 光通量	Battery Capacity 电池容量	Using / Charging Time 使用/充电时间
1200lm	2*2200mAh	Use 20-25hrs Charge 7hrs
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
40*40*180	60	45.5*41*35
LED Type LED光源	Color Temp. 色温	Body Material 材质
COB	3000/6500K Red	ABS+PC



XGYWL-WS-H08

Total Lumen 光通量	Battery Capacity 电池容量	Using / Charging Time 使用/充电时间
2000lm	5*2200mAh	Use 5-9hrs Charge 7hrs
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
45*135*145	20	35.5*33*33.5cm
LED Type LED光源	Color Temp. 色温	Body Material 材质
SMD+COB	3000/6500K Red	ABS+PC